



The Fred is the Meijer Holland bale grab to stack big bales. Available in six different versions, the Fred is the perfect grab when it comes to stacking and moving big bales of hay and straw. Special versions are available on request.

## Fred

- suitable for front loader, wheel loader, telescopic handler, forklift or crane
- all bales are grabbed by the hooks
- the special developed hook of high quality steel turns deep into the bale and pulls the bales against the main frame
- if the grab is tilted forwards, the bales do not fall off, thanks to the rotating axles with hooks



Type	Number of bales	Width	Height	Weight	Number of hooks	Axle Ø
<b>Fred 2-3</b>	2x 90 cm high 3x 70 cm high (telescopic beams needed)	165 cm	125 cm	310 kg	6	45 mm
<b>Fred 3-4</b>	3x 90 cm high 4x 70 cm high	165 cm	230 cm	455 kg	12	45 mm

## Fred Heavy Duty

- suitable for front loader, wheel loader, telescopic handler, forklift or crane
- designed for intensive use
- removable axles, which makes wearing parts replaceable
- cylinder mounting with special bolt with lubrication groove
- reinforced lower corners
- heavy cylinder



Type	Number of bales	Width	Height	Weight	Number of hooks	Axle Ø
<b>Fred 3-4 Heavy Duty</b>	4x 90 cm high 5x 70 cm high (telescopic beams needed)	175 cm	230 cm	515 kg	12	50 mm
<b>Fred 4-5 Heavy Duty</b>	4x 90 cm high 5x 70 cm high	175 cm	280 cm	525 kg	12	50 mm



## Super Fred


- suitable for fork lift truck or tele truck (min. lifting power 4 tons)
- with tilting system to load vertically and horizontally
- 6/2 electric valve to choose for grabbing or tilting



Type	Number of bales	Width	Height	Weight	Number of hooks	Axle Ø
<b>Super Fred 3-4</b>	3x 90 cm high 4x 70 cm high	170 cm	230 cm	680 kg	12	45 mm
<b>Super Fred 3-4 Heavy Duty</b>	4x 90 cm high 5x 70 cm high (telescopic beams needed)	170 cm	230 cm	760 kg	12	50 mm

### Options Fred series

- removable brackets
- 3 removable frontloader tines (length after assembly 950 mm or 660 mm)
- hydraulic hoses and couplings
- overpressure relief valve for pressure higher than 180 bar or for bales with density higher than 200 kg/m<sup>3</sup>

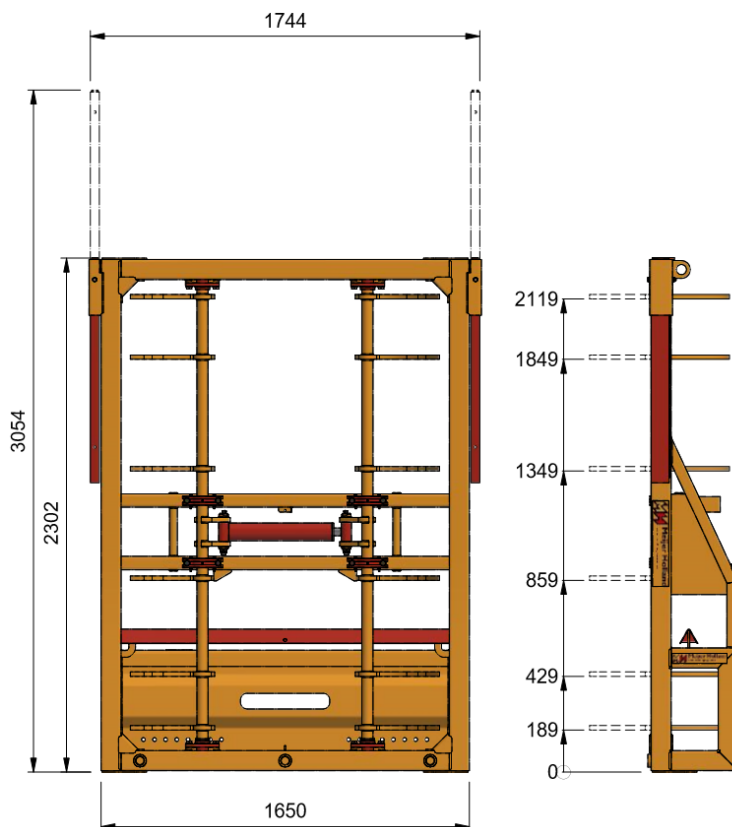

*Fred 3-4 Heavy Duty*